

MSP 400

EMI/RFI Protected Stainless Steel Isolated Pressure Transducer

Low Cost OEM; 100 Percent Leak Proof

No "O" Rings, No Silicone Oil, No Welds

The MSP 400 series pressure transducers set a new price-performance standard for low cost, high volume, commercial and industrial applications. This series is suitable for measurement of liquid or gas pressure, even for difficult media such as contaminated water, steam, and mildly corrosive fluids or gases.

The transducer pressure cavity is machined from a solid piece of 17-4 PH stainless steel. The standard version includes a 1/4 NPT pipe thread allowing a lead-proof, all metal sealed system. There are no o-rings, welds or organics exposed to the pressure media. The durability is excellent.

Measurement Specialties proprietary Microfused technology, derived from demanding aerospace applications, employs micromachined silicon piezoresistive strain gages, fused with high temperature glass to a stainless steel diaphragm. This approach

achieves media compatibility simply and elegantly providing an exceptionally stable sensor without the p-n junctions of conventional micromachined sensors.

This product is geared to the OEM customer using medium to high volumes. The standard version is suitable for many applications, but the dedicated design team at our Transducer Engineering Center stands ready to provide a semi-custom design where the volume and application warrants.



FEATURES

- ◆ One-Piece Stainless Steel Construction
- ◆ Ranges up to 10,000 PSI or 700 BAR
- ◆ Amplified Outputs
- ◆ Excellent Accuracy
- ◆ Wide Operating Temperature Range

APPLICATIONS

- ◆ Pumps and Compressors
- ◆ Hydraulic/Pneumatic Systems
- ◆ Off Road
- ◆ Energy and Water Management
- ◆ Pressure Instrumentation
- ◆ Refrigeration Equipment
- ◆ Agriculture Equipment
- ◆ Train Breaking Systems

Environmental Performance

Operating temperature range	-40 to 185°F (-40 to 85°C), (For other temperature ranges consult factory)
Compensated temperature range	30 to 158°F (0 to 70°C)
Zero thermal error	<±1.5% of FS
Span thermal error	<±1.5% of FS
Storage temperature range	-40 to 212°F (-40 to 100°C)
Shock	50g, 11msec half sine shock per MIL standard 202F, method 213B, condition A
Vibration	±20g MIL-STD-810C, Procedure 514.2, Figure 514.2-2, curve L
EMI/RFI Immunity	EN 50081-2 EN 50082-2 (10V/M, 26-1000MHz) EN 61326 (Effective July 1, 2001)

internet:www.msicons.com

Tel: 1-757-766-1500

North America Toll Free: 1-800-745-8008

Fax: 1-757-766-4297

RevA 2/18/04

msiconsensors
innovation • performance • reliability

Schaevitz
IC Sensors
Microfused
Piezo Film

mechanical specifications


Performance at 77° F (25° C)

Pressure range	0 to 100, 250, 500, 1000, 2500, 5000, 10000 PSI (0 to 7, 17, 35, 70, 175, 350, 700 BAR)
Accuracy (combined linearity, hysteresis and repeatability)	±.5% of FS Span (for higher accuracy consult factory)
Media compatibility	17-4 PH stainless steel (for other material consult factory)
Pressure ports	1/4" NPT (for other ports consult factory)
Pressure cycles	>10 ⁸ full pressure cycles
Pressure overland	2X rated pressure
Burst pressure	5X or 20000 PSI whichever is less
Long term stability (1 year)	±0.25% FS Span (Typical)

Electrical:

Supply voltage	5VDC	10-30VDC
Supply current	<10mA	<15mA
Outputs		1-5VDC, fixed (4)
		0.5-4.5VDC, ratiometric to supply (3) 4-20mA, two wire (5)
Interface		2 ft. of PVC jacketed cable (for other options consult factory)
Zero offset		±2% of FS Span (for tighter tolerances consult factory)
Span tolerance		±2% of FS Span (for tighter tolerances consult factory)
Output load		5K Ohm (min) for high level voltage 0 Ohms @ 10V (1100 Ohms @ 32V) for 4-20mA
Noise		<2mVRMS
Bandwidth (-3dB)		DC to 1KHz (Typical)

ordering information

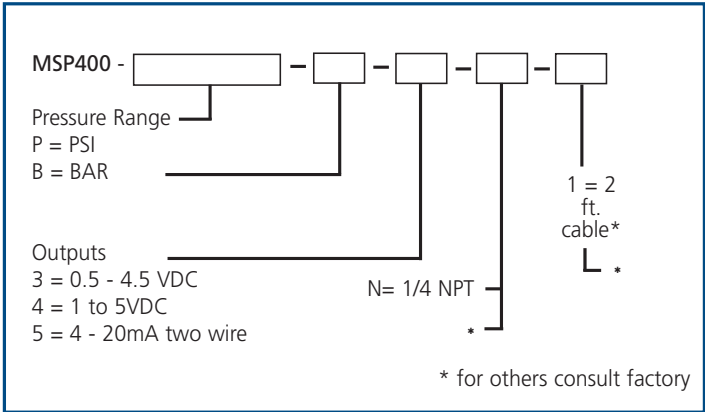

Electrical Connections:

Outputs:	3/4	5
	Red +Supply	Red +Supply
	Black Ground	Black Output
	White Output	

mechanical dimensions

