

Model 68C Accelerometer

DC Response

Durable Cable

Reliable Performance

Low Cost

Triaxial

World
SID

DESCRIPTION

The **Model 68C** accelerometer is a small, compact triaxial device designed for vehicle impact and road testing. Its mechanical overload stops provide high shock protection in rugged applications. Featuring ranges from 500 g to 2000 g and frequency response to 3000 Hz, this sensor is easily mounted in hard to reach places. This accelerometer is compliant with J211 specifications for anthropomorphic dummy applications.



FEATURES

- ◆ 2nd Generation MEMS Sensing Elements
- ◆ 2000 g Full Scale Range
- ◆ 2-10 VDC Excitation
- ◆ 0-50 °C Temperature Compensation
- ◆ <±50 mV Zero Measurand Output
- ◆ Mechanical Overload Stops
- ◆ Replaceable Sensors

APPLICATIONS

- ◆ Crash Testing
- ◆ Impact Testing
- ◆ Off-Road Testing
- ◆ Road Testing

dimensions

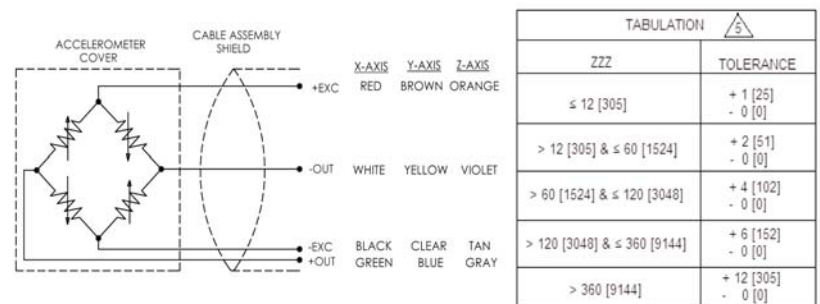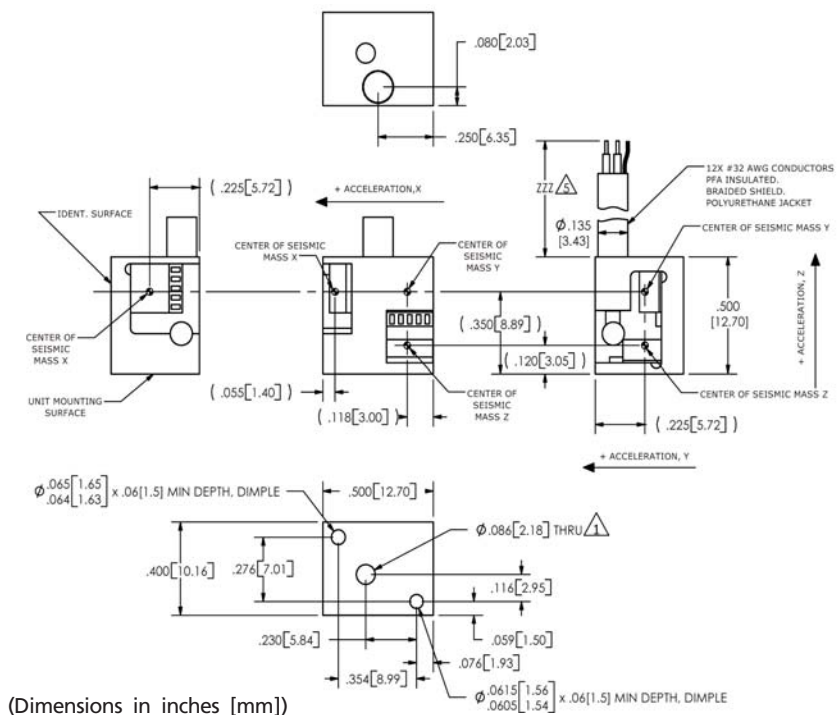

www.meas-spec.com
Tel: 949-716-5377
Fax: 949-916-5677
Email: vibration@meas-spec.com

Model 68C Accelerometer


performance specifications

All values are typical at 24 °C, 100 Hz and 10 Vdc excitation unless otherwise stated. Measurement Specialties reserves the right to update and change these specifications without notice.

PARAMETERS

DYNAMIC			Units	Notes
Range	500	2000		
Sensitivity	0.9	0.15	mV/g	
Frequency Response	0-3000	0-3000	Hz	±5%
Resonance	17,000	26,000	Hz	Gas Damped
Non-Linearity	±1		% FSO	
Transverse Sensitivity	<3		%	
Zero Acceleration Output	<±50		mV	
Thermal Zero Shift, 0 - 50°C(32 - 122°F)	±0.05 (±0.03)		%FSO/°C (%FSO/°F)	
Thermal Sensitivity Shift, 0 - 50°C(32 - 122°F)	±0.1 (±0.06)		%°C(%°F)	
ELECTRICAL				
Voltage Excitation	2 to 10		Vdc	
Input Impedance	3500 to 4800		Ω	
Output Impedance (Varies with current)	2700 to 4800		Ω	
Insulation Resistance	>100		MΩ	
Ground Isolation	Isolated			
Cable Output	Tinned Leads			72" Standard Length
PHYSICAL				
Case Material	Stainless Steel			
Weight	7		grams	Without Cable
Mounting	Screw			M2 X0.4, 16mm Length
Mounting Torque	3(0.3)			Lb-in(Nm)
ENVIRONMENTAL				
Shock Limit	5000	10000	g's	
Operating Temperature	-20 to +85 / -4 to +185			°C/°F
Humidity	Epoxy sealed			
PART NUMBERING	Model Number+Range+Cable Length			

ordering information

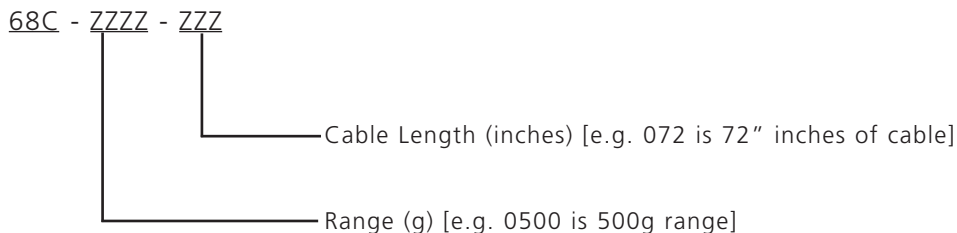

Custom connector options are available, Contact Measurement Specialties, Inc. for applicable model number.

www.meas-spec.com
 Tel: 949-716-5377
 Fax: 949-916-5677
 Email: vibration@meas-spec.com

Measurement Specialties, Inc. • 1000 Lucas Way Hampton, VA 23666 USA • www.meas-spec.com • 757-766-1500 • 800-745-8008 • Fax 757-766-4297